

## Constants

DEBUG	false
CORE_ROOT	dirname(__FILE__)
APP_PATH	app
HELPER_PATH	helpers
BASE_URL	http://example.com/?/
URL_SUFFIX	null
DEFAULT_CONTROLLER	index
DEFAULT_ACTION	index

NOTE: All or part of constants can be defined in an external file

## Dispatcher static

Dispatcher::addRoute ( **route**, [destination] )  
*route can be an array route => destination*

Dispatcher::splitUrl ( **url** )

Dispatcher::dispatcher ( [requested\_url] )

Dispatcher::getController ( )

Dispatcher::getAction ( )

Dispatcher::getParams ( )

Dispatcher::getCurrentUrl ( )

Dispatcher::getStatus ( )

Dispatcher::executeAction ( **controller**, **action**, **params** )

## View ( **file**, [vars] )

-> assign ( **name**, [value] )

-> render ( )

-> display ( )

-> \_\_toString -> render ( )

Extra light  
**Framework.php**

by Philippe Archambault  
philippe.archambault@gmail.com  
http://www.madebyfrog.com

VERSION 1.6

## Record ( [data] )

Record::connection ( **connection** )

Record::getConnection ( )

Record::logQuery ( **sql** )

Record::getQueryLog ( )

Record::query ( **sql**, [value] )

Record::tableNameFromClassName ( **class\_name** )

Record::escape ( **string** )

Record::lastInsertId ( )

Record::getColumns ( )

Record::insert ( **class\_name**, **data** )

Record::update ( **class\_name**, **data**, **where** )

Record::deleteWhere ( **class\_name**, **where**, [value] )

Record::findByIdFrom ( **class\_name**, **id** )

Record::findOneFrom ( **class\_name**, **where**, [value] )

Record::findAllFrom ( **class\_name**, **where**, [value] )

Record::countFrom ( **class\_name**, **where**, [value] )

-> setFromData ( **data** )

-> save ( )

-> delete ( )

-> beforeSave ( )

-> beforeInsert ( )

-> beforeUpdate ( )

-> beforeDelete ( )

-> afterSave ( )


-> afterInsert ( )

-> afterUpdate ( )

-> afterDelete ( )

NOTE: Connection must be a PDO or PDO adapter, like that, in where condition you will be able to use ? or :var and then pass an array in the value param. ( php.net/pdo )

Directories structure example

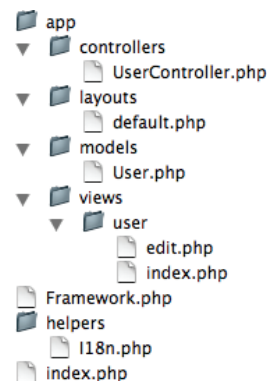

## Controller

-> execute ( **action**, **params** )

-> setLayout ( **layout** )  
*/app/layouts/layout.php*

-> assignToLayout ( **var**, **value** )

-> render ( **view**, [vars] )

-> display ( **view**, [vars], [exit=true] )

-> renderJSON ( **data\_to\_encode** )

## AutoLoader static

AutoLoader::addFile ( **class\_name**, [file] )

AutoLoader::addFolder ( **folder** )

AutoLoader::load ( **class\_name** )  
*called from the \_\_autoload function*

## Flash static

Flash::get ( **var** )

Flash::set ( **var**, **value** )

Flash::clean ( )

Flash::init ( )

## Inflector static

Inflector::camelize ( **string** )

Inflector::underscore ( **string** )

Inflector::humanize ( **string** )

## Global Functions

use\_helper ( **helper1**, helper2, ... )

use\_model ( **model1**, model2, ... )

get\_url ( **param1**, param2, ... )

get\_request\_method ( )  
*possible value returned: GET, POST or AJAX*

redirect ( **url** )

redirect\_to -> redirect

page\_not\_found ( )

convert\_size ( **size** )

memory\_usage ( )

execution\_time ( )

get\_microtime ( )

odd\_even ( )